

Osprey® Talon SAH-E23
 build: 1.1.0.66
 serial number: TA15430006
 mode: 1x3 MBR Mode
 device name: SAH-E23

[logout](#)

System Control

Status

Stream 1

+

Talon IP Setup

Use DHCP

Local IP Address:

Local Netmask:

Default Gateway:

DNS Server IP 1:

DNS Server IP 2:

[Stop All Streams](#)

[Start All Streams](#)

Build Date: 01-28-2016-11:37:11 AM

Device Management


[Set Name](#)

[Set Password](#)

[Reboot](#)

[Update Firmware](#)

Operating Mode:



Osprey® Talon SAH-E23
 build: 1.1.0.66
 serial number: TA15430006
 mode: 1x3 MBR Mode
 device name: SAH-E23

[logout](#)

System Control

Status

Stream 1

Stream 2

+

Video Status

CH	Bitrate (Kbps)	Actual Bitrate	FPS	Actual FPS	Key-frame FPS	Width	Height
1	700.00	569.79	60.0	60.0	1.0	640	360

Audio Status

Channel	Subchannel	Codec
1	1	fdk_aac1c

Stream Status

Channel	URL	Frames
1	rtmp://1.21790574.fme.ustream.tv/ustreamVideo/21790574//VQksHKQTV2SdCh5ZmsFmJSYRLJRZEK6q	448

Input Status

Input	Resolution	FPS
HD-SDI1	1920x1080p	59.94
COMPOSITE2	720x480i	29.97

[Refresh](#)

Auto Refresh

Stream 1 Controls

stop

start

Save

clone

delete

status: RUNNING

Encoder Setup

Video Source

16:9

Video Resolution

Video Bit Rate

Frame Rate Divider

Video Profile

GOP Size

Number of B-frames

Deinterlacing

Maximum Delay

Audio Enable

Output Setup

Output Format

XML File:

RTMP://


Authentication

Frame Align

Audio Info

	Sub Channel 1	Sub Channel 2	Sub Channel 3	Sub Channel 4
Enable	<input type="text" value="yes"/> <input type="button" value="v"/>	<input type="text" value="yes"/> <input type="button" value="v"/>	<input type="text" value="no"/> <input type="button" value="v"/>	<input type="text" value="no"/> <input type="button" value="v"/>
Source	<input type="text" value="HD-SDI"/> <input type="button" value="v"/>	<input type="text" value="Analog"/> <input type="button" value="v"/>	<input type="text" value="HD-SDI"/> <input type="button" value="v"/>	<input type="text" value="HD-SDI"/> <input type="button" value="v"/>
Codec	<input type="text" value="ARM AACLC"/> <input type="button" value="v"/>	<input type="text" value="ARM AACLC"/> <input type="button" value="v"/>	<input type="text" value="ARM AACLC"/> <input type="button" value="v"/>	<input type="text" value="ARM AACLC"/> <input type="button" value="v"/>
Sample Rate	<input type="text" value="48000 Hz"/> <input type="button" value="v"/>	<input type="text" value="48000 Hz"/> <input type="button" value="v"/>	<input type="text" value="48000 Hz"/> <input type="button" value="v"/>	<input type="text" value="48000 Hz"/> <input type="button" value="v"/>
Bit Rate	<input type="text" value="96 Kbps"/> <input type="button" value="v"/>	<input type="text" value="96 Kbps"/> <input type="button" value="v"/>	<input type="text" value="96 Kbps"/> <input type="button" value="v"/>	<input type="text" value="96 Kbps"/> <input type="button" value="v"/>
Mode	<input type="text" value="stereo"/> <input type="button" value="v"/>	<input type="text" value="stereo"/> <input type="button" value="v"/>	<input type="text" value="stereo"/> <input type="button" value="v"/>	<input type="text" value="stereo"/> <input type="button" value="v"/>

Talon Finder

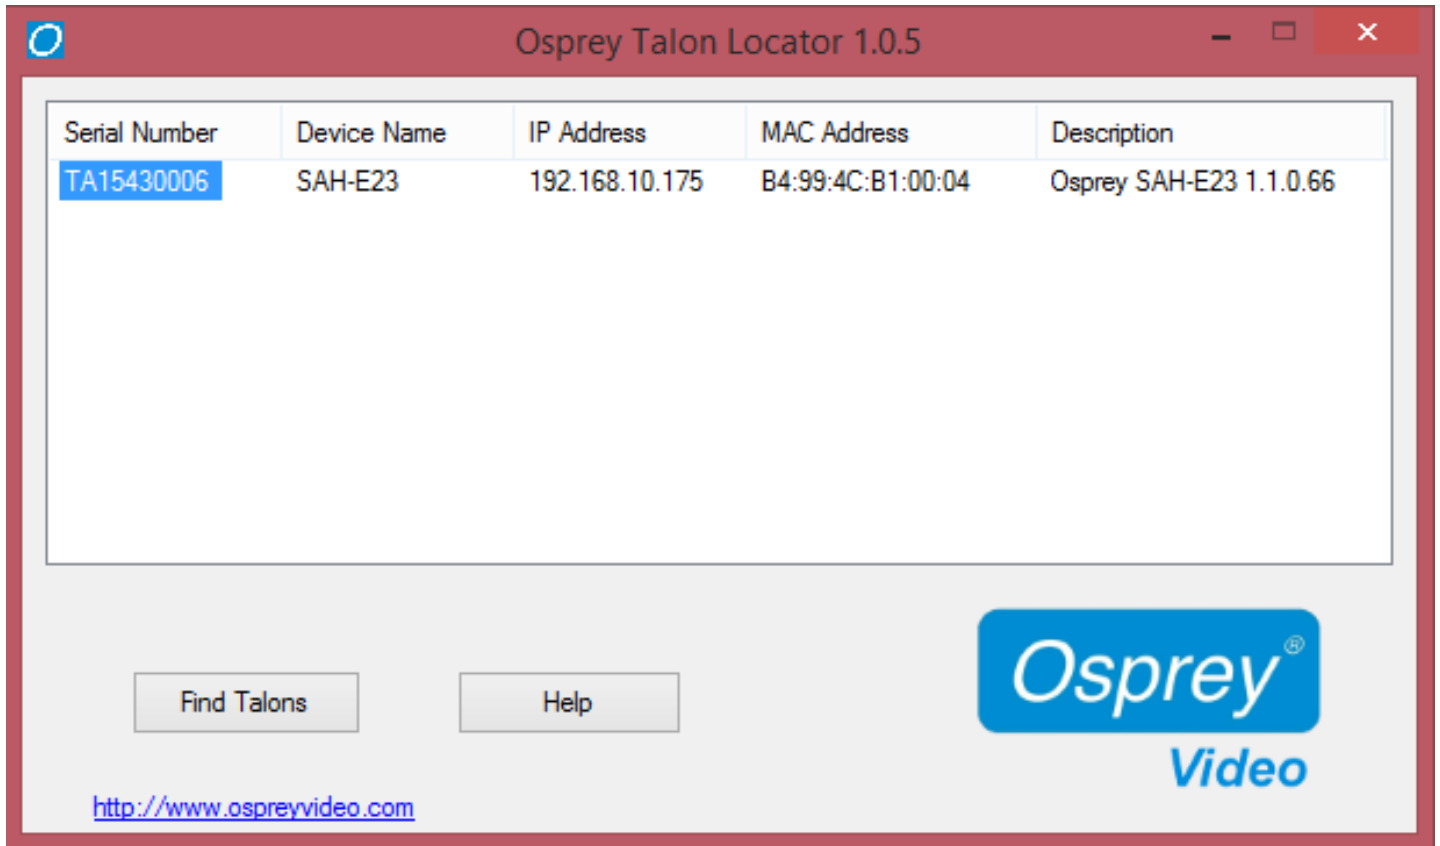

Mobile Interface

